

## FEATURES AND BENEFITS

**MB™ Micro-Bit™ Engineering**

# ZXL


- Designed to fasten steel roofing to wood purlins used in post-frame construction, plywood or OSB used in residential construction.
- 5/16" cupped HWH with a molded ZAMAC Zinc-Aluminum alloy provides lifetime protection against red rust on the head & washer. You may obtain a free copy of the written warranty upon request.
- ZXL™ is an excellent choice for GALVALUME & other long-life metal roof panels.
- Threads transition from fine to coarse to generate superior holding strength in various wood substrates.
- Micro-Bit™ point reduces metal shavings that can embed themselves in the rubber washer.

ALL UNPAINTED WOODBINDER MB FASTENERS COME STANDARD WITH DURASEAL® PLUS ENHANCED CORROSION RESISTANCE COATING

FOR PROPER INSTALLATION, THE USE OF IMPACT DRIVERS ARE NOT RECOMMENDED FOR POWDER COATED OR ANY WET PAINTED FASTENER.

PULLOUT & PULLOVER VALUES ARE DETERMINED IN THE ST FASTENING SYSTEMS ENGINEERING LABORATORY USING STEEL PANELS/FRAMING & WOOD DENSITIES WHOSE STRUCTURAL PROPERTIES ARE FOUND IN PRESENT DAY PRODUCTS.


THE MB MICRO-BIT POINT MAY GENERATE SMALL METAL SHAVINGS UPON INSTALLATION. IT IS RECOMMENDED TO CLEAN/SWEEP THE METAL PANELS AFTER INSTALLATION TO PREVENT PREMATURE RUST SPECKS.

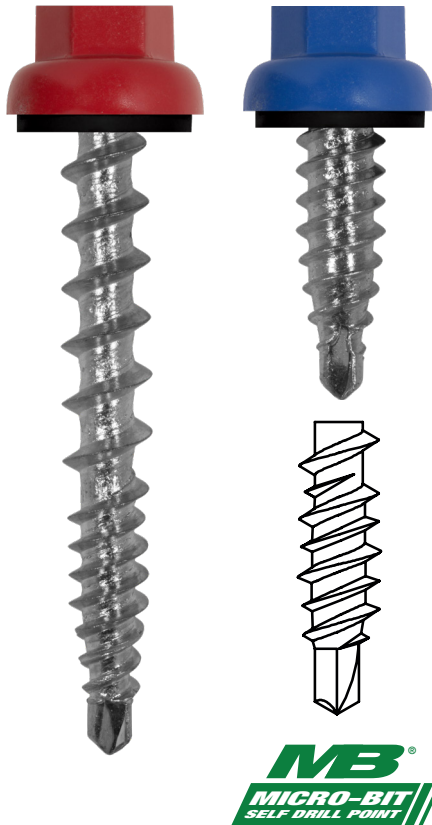

**MB™**  
MICRO-BIT™  
SELF DRILL POINT

<b>HEAD STYLE</b>
5/16" CHWH**
<b>DRILL POINT</b>
MICRO-BIT™
<b>MAJOR DIAMETER</b>
.210/.191 .215/.209 STITCH
<b>MINOR DIAMETER</b>
.121/.116 .160/.153 STITCH
<b>WASHER/HEAD DIAMETER</b>
.500" .500" STITCH
<b>HEAD ACROSS FLATS</b>
NOM .312" NOM .312" STITCH
<b>ULT. TENSILE STRENGTH</b>
1575** LBS. 1575** LBS.* STITCH
<b>MIN. TORSIONAL STRENGTH</b>
60 IN.-LBS. 88 IN.-LBS. STITCH
<b>NOM. SHEAR STRENGTH</b>
1574 LBS. 1962 LBS. STITCH

- NOTES**
1. \*\*CHWH-Cupped Hex Washer Head.
  2. \*\*\* Tabulated value is the force at which the ZXL head breaks from the carbon steel body.
  3. All strength values shown are ultimate values, express in LBS. Apply an appropriate safety factor to obtain design limits.

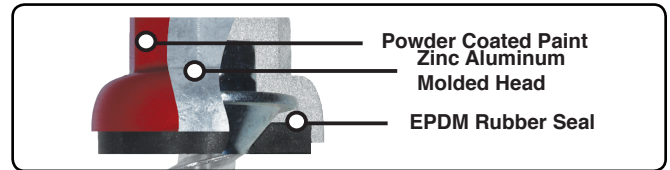

The Zinc-Aluminum alloy HWH prevents red rust from ever starting. Spring retainer sockets are designed to allow for the added thickness of the powder coat and are recommended.





The combination of the Micro-Bit point & transition thread from fine to coarse generates superior drill speed in metal & holding strength in wood substrates.

**No Red-Rust Guaranteed!**

## APPLICATIONS



**POWERFUL™**  
CORROSION DEFENSE  
POWDER COAT SYSTEM



SIZE	CARTON QTY.	WEIGHT/M
10 x 1"	3000	12.7
10 x 1 1/2"	2500	14.7
10 x 2"	2000	17.0
10 x 2 1/2"	1500	19.2
10 x 3"	1000	21.0
12 x 3/4" Stitch	2500	9.0

PULL OUT STRENGTH LBS. ULT.			
SUBSTRATE	PENETRATION	10-16/8 VALUE	STITCH VALUE
3/4" PLY	FULL	636	N/A
5/8" PLY	FULL	441	N/A
5/8" PLY	1/2"	N/A	297
1/2" PLY	FULL	368	N/A
1/2" PLY	1/2"	N/A	329
7/16" OSB	FULL	210	N/A
7/16" OSB	1/2"	N/A	217
2 X Y. PINE	1"	713	N/A
2 X Y. PINE	1/2"	N/A	495
2 X Y. PINE	1 1/2"	1526	N/A
2 X SPF	1"	466	N/A
2 X SPF	1/2"	N/A	162
2 X SPF	1 1/2"	1216	N/A

PULL OVER STRENGTH LBS. ULT.			
SUBSTRATE	GAUGE	10-16/8 VALUE	STITCH VALUE
AZ55 Galvalume	29	658	658
AZ55 Galvalume	26	927	927
AZ55 Galvalume	24	1035	1035
AZ55 Galvalume	22	1386	1386